

Tracked Digibox

Product Specification

1,200 mm (L) x 1,000 mm (W) x 740 mm (H)



The Digibox is a lightweight yet long-lasting and 100% tracked pallet box, weighing just 36.5 kg. Built with durability in mind, it supports a stacking load capability of 5,000 kg, holding capacity of 700 kg and dynamic load capability of 1,200 kg.


This product is resistant to most chemicals and cleaning agents, food-safe and HACCP compliant. Plus, the Digibox can protect products between -30°C to +40°C, and briefly up to +90°C.



Like many Digipal products, the Digibox is stackable for ease of use and storage. It has three unwelded runners, making handling with forklift trucks much easier. These boxes are also IoT-enabled, enabling 100% real-time visibility and enhanced asset tracking across your supply chain. The Digibox is designed for superb performance, functionality and sustainability.

The Digibox is a pooled rental unit, owned by Digipal. These are purple as standard – other colour and labelling options are available (for purchase only).

Dimensions (mm)

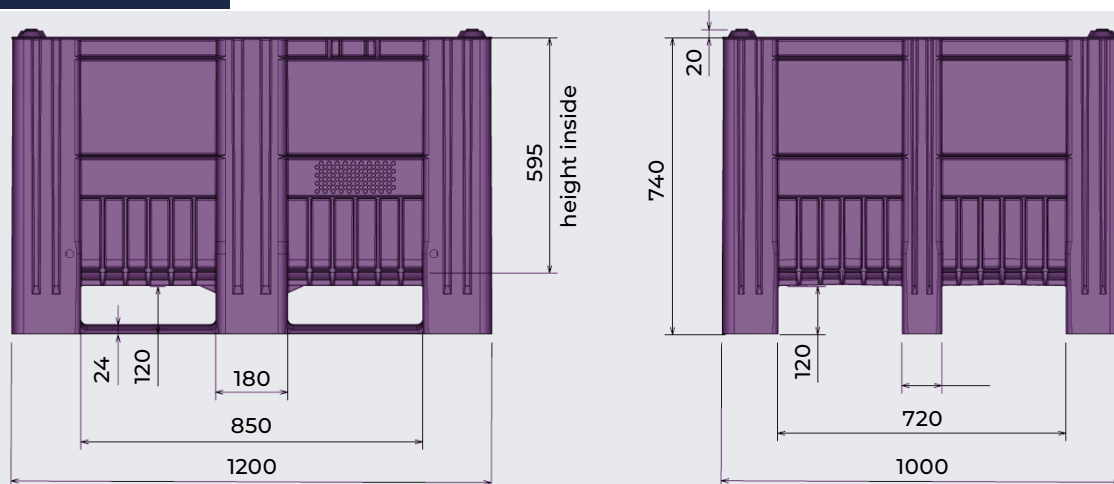

Technical Data¹

External Dimensions	1,200 x 1,000 x 740 mm	Internal Dimensions	1,130 x 925 x 595 mm
Weight	36.5 kg	Volume	610 l
Material²	PE contains high-quality recycled PE		
Load Capacity³	Stacking Load 5,000 kg	Holding Capacity 700 kg	Dynamic Load 1,200 kg

Characteristics

- Tracking type: cellular
- Colour: purple (other colours are available for purchase only)
- Runners: 3, unwelded
- Stackable
- Temperature stability: -30 °C to +40 °C, briefly up to +90 °C
- Resistant to most chemicals and cleaning agents
- Food-safe. HACCP compliant
- Container is based on DIN EN 13626 and DIN EN ISO 12048

Options

- **Transponder**
- **Lid**
- **Drain port**

Loading Quantities (Pcs / Approximate amount)

Container	Container 20': 40 Container 40': –	Container 40' High Cube: 106 Conventional trailer 45' high cube container: –
Truck	MEGA-Trailer: 130	Jumbo: 140-150

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

Aspect



¹ All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Contact our team to discuss the specific requirements of your individual application.

² Contact us for exact information about material compositions.

³ Stacking Load: With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20°C.
Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 20°C.